

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 982 971 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
01.03.2000 Bulletin 2000/09

(51) Int Cl.7: H04R 25/00, H04R 3/04

(21) Application number: 99306623.2

(22) Date of filing: 20.08.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: KNOWLES ELECTRONICS, INC.
Itasca, Illinois 60143 (US)

(72) Inventor: Thompson, Stephen C.
Naperville, IL 60564 (US)

(30) Priority: 25.08.1998 US 97926 P
16.11.1998 US 193012


(74) Representative: Dunlop, Brian Kenneth Charles
c/o Wynne-Jones, Lainé & James
22 Rodney Road
Cheltenham Gloucestershire GL50 1JJ (GB)

(54) Apparatus and method for matching the response of microphones in magnitude and phase

(57) An apparatus is provided for matching the response of a pair of microphones. The two microphones provide a first and second output, respectively, in response to an audible input. The microphone outputs are subtract from each other to produce a gain control output for operably controlling the gain of the first microphone output, resulting in a gain compensated microphone output. A phase adjustment circuit also is provided

ed responsive to the gain compensated microphone output and a rolloff control output for producing a matching output. The rolloff control output is generated by a phase difference subtractor circuit responsive to both the matching output and the second microphone output. Moreover, the output of at least one of the microphones has a resonance frequency that is shifted to a desired preselected frequency.

FIG. 4

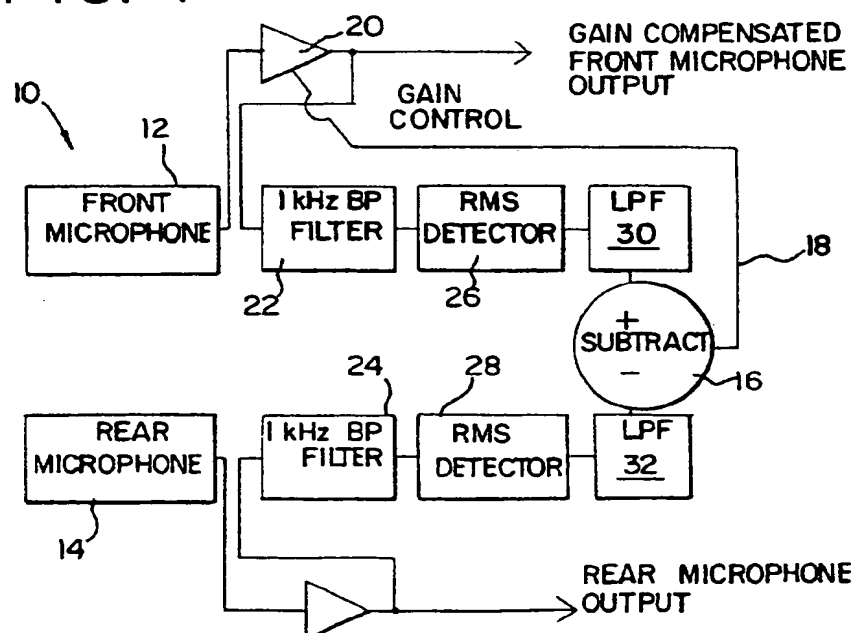

EP 0 982 971 A2

Description

Related Applications

[0001] This application claims the benefit of U.S. Provisional Application No. 60/097,926, filed August 25, 1998.

Technical Field

[0002] The present invention generally relates to devices for matching outputs of a pair of microphones, and in particular to an apparatus and a method that compensates for variations in the sensitivity, low frequency rolloff, and resonance peak of at least one of the microphones.

Background of the Invention

[0003] Hearing aids for providing a user selectable directional response have become quite popular in the marketplace. In a noisy environment, the user of such an aid can select the directional pattern and thus eliminate some of the noise coming from the rear. This can increase the signal to noise level enough to improve the intelligibility of speech originating from the forward direction. In a quiet environment, the user would normally switch to the nondirectional pattern in favor of its better performance in quiet.

[0004] One way to achieve a directional response in a hearing aid is to use two omnidirectional microphones, and to combine their electrical signals to form the directional beam. Compared to the use of a directional microphone, the Dual Omni approach has some advantages. However, it also carries the requirement that the response of the two microphones be accurately matched in magnitude and phase. The matching must be accurate throughout the frequency band where directionality is needed, and must remain matched throughout the life of the hearing aid. Normal variations in microphone manufacturing do not provide a close enough match for most applications.

[0005] Often it has been necessary to specially measure and select the microphones for use in a paired application. The present invention presents an apparatus and method of compensation for the variations in microphone performance. An electrical circuit is used with one or both of the microphones to achieve the necessary match in response for directional processing. The response of the circuit can be "tuned" to each microphone at the final stages of manufacturing, as a part of the fitting process, automatically, or even at a periodic follow-up visit if the characteristics of the microphone have changed through aging or abuse.

The Microphone Model

[0006] A simple model for a microphone is assumed

herein. The frequency response shown in FIGURES 1 and 2 is characteristic of many electret microphone designs used in devices such as hearing aids. Mathematically, the response can generally be represented as:

$$M(\omega) = M_0 L(\omega) H(\omega)$$

where

$L(\omega)$ models the low frequency rolloff, and $H(\omega)$ models the mid and high frequency behavior, including the diaphragm resonance.

[0007] The assumption that the microphone response can be separated in this way makes the analysis much simpler without introducing a significant error for most actual microphone responses used for directional hearing aids and the like. It works well for any microphone whose low frequency rolloff is separated in frequency from its diaphragm resonance. (The so-called "ski slope" microphone responses are not of this variety and would require a different analysis; but they are not well suited for use in devices such as directional hearing aids.)

[0008] The low frequency rolloff is approximated as a single-pole filter:

$$L(\omega) = \frac{j \frac{\omega}{\omega_l}}{1 + j \frac{\omega}{\omega_l}}$$

where ω_l is the corner frequency for the low frequency rolloff. The higher frequency behavior is approximated by:

$$H(\omega) = \frac{1}{1 - \frac{\omega^2}{\omega_r^2} + j \frac{\omega}{Q\omega_r}}$$

where ω_r is the corner diaphragm resonance frequency and Q is the mechanical quality factor of that resonance.

[0009] Variations in production may cause the response of an individual microphone to vary in several ways from this nominal response: 1) The sensitivity level M_0 of the entire curve may shift to higher or lower values due to variations in electret charge or diaphragm stiffness; 2) The corner frequency ω_l of the low frequency rolloff may move to a higher or lower frequency due to variation in the size of the barometric relief hole in the diaphragm; and 3) The frequency ω_r of the resonance peak may shift to a higher or lower value due to variation in the diaphragm tension or other assembly details. Each of these changes has a different impact on the ability to obtain an adequate match for directional processing.

[0010] The phase error caused by differences in ω_1 and ω_2 can be seen in FIGURE 3. This shows the phase difference between the two microphone outputs when there is a 10% shift in the low frequency rolloff and a 10% shift in the resonance frequency.

Summary of the Invention

[0011] The present invention provides for matching the response of a pair of microphones.

[0012] The structure embodying the present invention is especially suitable for providing directional response. The invention provides for compensating for gain differences between the pair of microphones. Also, the invention compensates for shifts in the low frequency rolloff and resonance frequency of at least one of the microphones.

[0013] The circuitry embodying the present invention includes a pair of microphones that generate a first and a second output, respectively, in response to an audible sound. The microphone outputs are subtracted from each other to produce a gain control output that operably controls the gain of the first microphone output resulting in a gain compensated microphone output. Also, a phase adjustment circuit responsive to both the gain compensated microphone output and a rolloff control output is provided to produce a matching output. The rolloff control output is generated by a phase difference subtractor circuit responsive to both the matching output and the second microphone output. Moreover, a resonance frequency shifting circuit is provided, responsive to the output of at least one microphone, to compensate for shifting the resonance frequency of the microphone output.

Brief Description of the Drawings

[0014] In the accompanying drawings that form part of the specification, and in which like numerals are employed to designate like parts throughout the same,

FIGURE 1 is a graph of the magnitude response of a simplified microphone model over a frequency range;

FIGURE 2 is a graph of the phase response of the same simplified microphone model used in FIGURE 1 over the same frequency range;

FIGURE 3 is a graph of the phase difference between two microphones with different corner frequencies for low frequency rolloff and different resonance peak frequencies;

FIGURE 4 is a simplified electrical circuit diagram, partially in block form, of a method to compensate for variations in midband sensitivity between two microphones;

FIGURE 5 is a simplified electrical circuit diagram, partially in block form, of a circuit to shift the low frequency rolloff of a microphone output;

FIGURE 6 is a simplified electrical circuit diagram,

partially in block form, of an automated compensation system to equal both the midband sensitivity and the low frequency rolloff of a microphone;

FIGURE 7 is a plurality of simplified electrical circuit diagrams, partially in block form, of various circuits for shifting the low frequency rolloff of a microphone output;

FIGURE 8 is a plurality of simplified electrical circuit diagram, partially in block form, of various circuits for shifting the resonance frequency of a microphone output;

FIGURE 9 is a simplified electrical circuit diagram, partially in block form, of a circuit to shift the resonance frequency of a microphone output;

FIGURE 10 is a plurality of graphs depicting the pattern variations between a pair of matched microphones at 500Hz with $\pm 10\%$ variation in low frequency rolloff frequency at 50Hz;

FIGURE 11 is a plurality of graphs illustrating the pattern variations between a pair of matched microphones at 300Hz with $\pm 10\%$ variation in low frequency rolloff frequency at 50Hz;

FIGURE 12 is a simplified electrical circuit diagram, partially in block form, of another circuit for shifting the low frequency rolloff of a pair of microphone outputs; and

FIGURE 13 is a plurality of graphs showing the improvement in directionality that is available with compensation, even when the compensation is imperfect.

Detailed Description

[0015] While this invention is susceptible of embodiments in many different forms, there is shown in the drawings and will herein be described in detail a preferred embodiment of the invention with the understanding that the present disclosure is to be considered as an exemplification of the principles of the invention and is not intended to limit the broad aspect of the invention to the embodiments illustrated. The present invention provides an apparatus and method for matching the response of microphones in magnitude and phase.

Compensating for Gain Differences

[0016] The present invention includes compensation to equalize the midband sensitivity M_0 . In an embodiment, such as for a hearing aid, this can be done either in a sound box or in the sound field of a room. Alternatively, it can be done as a final step in the manufacturing process, during the fitting process, or as a "tune up" during a periodic checkup. Preferably, the frequency content of the acoustic test signal used to equalize the midband is confined to the flat portion of the sensitivity curve, which is generally near 1 kHz. For example, an appropriate signal would be a one-third octave noise band centered at 1 kHz.

[0017] In analog circuitry, the gain adjustment can be implemented with a simple trimmer to adjust the gain. In a device such as a programmable hearing aid, the gain value can be stored in memory and implemented in a programmable resistor. Each of these can also provide for periodic recalibration in the office of an audiologist.

[0018] In an embodiment, a very slow acting automatic gain control ("AGC") operates on the output of one microphone to match its output to the level of the other. A block diagram 10 of such a system is shown in FIGURE 4. The system can be mounted, for example, within a hearing aid housing and includes a front microphone 12 and a rear microphone 14 having respective outputs responsive to an audible input. A subtractor circuit 16 is provided responsive to the front microphone output and the rear microphone output for producing a gain control output 18. In response to the front microphone output and the gain control output 18, circuit 20 produces a gain compensated microphone output.

[0019] More particularly, the signal from each microphone 12, 14 is buffered and processed through a band-pass filter ("BPF") 22, 24 with a center frequency of approximately 1 kHz. Each filtered signal is sent through an energy detector, such as an RMS detector 26, 28, and then a low pass filter 30, 32. At this point, the signals represent the time average of the signal energy in each channel. These level estimates are subtracted by circuit 16 to provide signal 18 proportional to the level difference between the microphone channels. This difference level is used to adjust the gain in one channel to better match the level of the other signal.

[0020] If the microphones 12, 14 were exactly matched in sensitivity, then the energy estimates would be equal. Accordingly, the subtraction would give a zero output, and the compensating gain would remain unchanged. If the microphone sensitivity were to change, then an error signal would be generated at the output 18 of the subtraction circuitry 16, and that error signal would change the gain in one channel to bring the two channels to equal output levels.

[0021] Preferably, the time constant of the AGC loop is long compared to the acoustic time delay between the signals from the two microphones, and long compared to the variability in level of speech. For example, in an embodiment, a time constant of 250 ms or greater can be used.

Compensating for Low Frequency Rolloff

[0022] As previously indicated, it is desirable to match the low frequency rolloff of the two microphones because phase errors at low frequencies are especially likely to degrade the directionality. FIGURE 3 shows that the phase error extends an octave or more above the corner frequency. In order to maintain good directionality below 500 Hz with microphones not having accurately matched rolloff frequencies, it is advantageous that

the low frequency rolloff be below 100 Hz. This has other disadvantages, however. The low frequency response allows significant low frequency acoustic noise from the environment to enter the microphone electronics. In some situations, this noise may saturate the low-level amplifiers. Once saturation occurs, electrical filters can no longer be used to remove the low frequency energy. A better solution is to provide an electrical compensation circuitry to match the phase of the two microphones so it is not necessary to use a very low rolloff frequency.

[0023] The primary advantage that comes with low frequency compensation is that the rolloff frequency can be accurately set at a specific frequency in the range of 150 to 250 Hz. If the two microphones are accurately matched after compensation, then good directionality is available throughout the low frequency range, and low frequency environmental noise will not corrupt the signals.

[0024] If a microphone has a low frequency corner frequency of ω_l , but the desired frequency is ω_d , then the transfer function or the compensation circuitry needed to shift the rolloff is:

$$Comp(\omega) = \frac{\omega_l}{\omega_d} \frac{1 + j \frac{\omega}{\omega_l}}{1 + j \frac{\omega}{\omega_d}}$$

[0025] The circuit of FIGURE 5 has the following transfer function:

$$T(f) = \frac{R + r}{R_l} \frac{1 + j\omega \frac{Rr}{R + r} C}{1 + j\omega r C}$$

[0026] Except for the minus sign, $T(f)$ can be made equivalent to $Comp(\omega)$ if:

$$r = \frac{1}{\omega_d C}$$

and

$$R = r \frac{\omega_d}{\omega_l - \omega_d}$$

[0027] In the above equations and FIGURE 5, C can be chosen arbitrarily, and R_l can be chosen independently to set the high frequency gain of the network. The circuit 34 within FIGURE 5 works only if ω_d is less than ω_l , in other words, the compensation circuit 34 can be used to lower the rolloff frequency, but not to raise it. Circuit 34 is only one example of many that can compensate the phase of a microphone. Other examples are

discussed later herein.

[0028] In general, the circuit 34 includes an input terminal 36, for receiving an output from a hearing aid microphone or the like, and an amplifier 38 having an inverting input and an output. Connected to the output of the amplifier 38 and the inverting input is a feedback circuit that includes a feedback adjustment circuit 40 responsive to a rolloff control input. Further, a gain control circuit 42 is operably connected between the input terminal 36 and the inverting input of the amplifier 38 for adjusting the gain of the microphone output.

[0029] Circuit 34 can be used in a compensation system in the following way: The corner frequencies for low frequency rolloff for both of the two microphones are first measured. Then, the compensation circuit is applied to the microphone with the higher corner frequency to match it to the microphone with the lower frequency rolloff. As an alternative, the microphones can be specified with a rolloff frequency that is slightly higher than the desired value in the final device such as a hearing aid. The compensation circuit can be applied to both microphones to match their rolloff to the desired frequency.

[0030] Measuring the rolloff frequencies of the two microphones can effectively be accomplished in the above embodiments by using the facilities of an acoustic test box. As such, an automated test system can be used to measure the frequency response of the two microphones and determine the component settings to achieve an adequate phase match.

[0031] In an alternative embodiment, an automated method to perform the low frequency compensation is shown in FIGURE 6 which also includes the magnitude compensator described above. The automated method includes a front microphone 12 and a back microphone 14 for producing respective outputs in response to an audible input. Responsive to the microphone outputs is a gain difference subtractor circuit 16 for producing a gain control output. A gain control circuit 42 is provided that, in response to the front microphone output and the gain control output, produces a gain compensated microphone output 44. Phase adjustment circuit 34 is responsive to the gain compensated microphone output 44 and a rolloff control output 46 for producing a matching output 48. The rolloff control output is generated by a phase difference subtractor circuit 50 responsive to the matching output 48 and the back microphone output.

[0032] In particular, the frequency compensation circuit assures that the 50 Hz response of the two microphones is the same. As shown, the sensitivity of the front microphone 12 is modified to match that of the rear microphone 14. Using the magnitude compensated front microphone signal, the two signals are again filtered, this time with a 50 Hz center frequency, where 50 Hz is assumed to be well below the low frequency rolloff of both microphones 12, 14. If the rolloff of the two microphones were the same, the filtered output of the two channels would have the same magnitude. Any difference in the levels is an indication that the rolloff frequencies

are different. This difference is used to adjust the controlling resistor value in the rolloff compensator circuit 34 for the front microphone 12.

[0033] Other examples of circuits that can be used to compensate the response are shown in FIGURES 7 and 8.

[0034] The primary advantage that comes with low frequency compensation is that the rolloff frequency may not be accurately set at a specific frequency in the range to 150 to 250 Hz. If the two microphones are accurately matched after compensation, then good directionality will be available throughout the low frequency range, and low frequency environmental noise will not corrupt the signals.

Compensating Shifts in Resonance Frequency

[0035] As stated above, the microphone model is the product of the midband sensitivity, the low frequency rolloff function and the high frequency resonance function, or

$$M(\omega) = M_o L(\omega) H(\omega).$$

[0036] Previously, methods of compensation for variations between microphones in sensitivity and low frequency rolloff have been discussed. Compensation for the shifts in the resonance frequency follow the same development. The form of the high frequency response is:

$$H_d(\omega) = \frac{1}{1 - \frac{\omega^2}{\omega_d^2} + j \frac{\omega}{Q_d \omega_d}}$$

[0037] For the high frequency behavior, if the microphone has resonance frequency ω_r , and Q-value Q_r , but the desired values for these parameters are ω_d and Q_d respectively, then the transfer function of the compensation circuit needed to shift the resonance frequency is

$$Comp_h(\omega) = \frac{H_d(\omega)}{H_r(\omega)} = \frac{1 - \frac{\omega^2}{\omega_r^2} + j \frac{\omega}{Q_r \omega_r}}{1 - \frac{\omega^2}{\omega_d^2} + j \frac{\omega}{Q_d \omega_d}}$$

[0038] FIGURE 9 depicts a circuit 60 for microphone resonance frequency shift compensation. In general, the circuit 60 includes an input terminal 62 for receiving an output from a microphone, and an amplifier 64 having an inverting input and an output. Connected to the output of the amplifier 64 and the inverting input is a feedback circuit 66 that includes a resistor R_f , an inductor L_f ,

and a C_f that are connected to each other in parallel. Further, an input circuit 68 is operably connected between the input terminal 62 and the inverting input of the amplifier 64 for adjusting the gain of the circuit output 70.

[0039] It is to be understood that circuit 60 and all other circuits presented herein are simplified and may have stability problems if implemented exactly as shown. It is assumed that the designer will add whatever components necessary to assure stability.

[0040] It can be shown that the circuit 60 of FIGURE 9 has the following transfer function:

$$T(\omega) = - \frac{L_f}{L} \frac{1 - \omega^2 LC + j\omega \frac{L}{R}}{1 - \omega^2 L_f C_f + j\omega \frac{L_f}{R_f}}$$

[0041] The two above equations for $H_d(\omega)$ and $Comp_h(\omega)$ have the same form (except for the minus sign), and can be made equivalent by proper selection of the circuit values. To do this, the values of the feedback components R_f , L_f , and C_f are chosen to match the desired resonance of the microphone, and the values of the components within the input circuit 68 are chosen to match the actual resonance. For accurate compensation, it is desirable to match both the resonance frequency and the Q of the actual microphone response. The inductor values L and L_f can be equal if unity gain is desired in circuit 60, or they can have different values if desired to adjust the gain. Otherwise the inductor values L and L_f can be chosen arbitrarily. Moreover, the value of one reactive component can be chosen arbitrarily.

[0042] As will be appreciated by those having skill in the art, other circuits that can be used to compensate the high frequency response such as, for example, those shown in FIGURE 8. Each of these circuits would be employed with a different strategy to compensate the different responses between two microphones.

A Practical Example - Low Frequency Rolloff

[0043] In an example, assume that two microphones are used as a "matched" pair in a device such as a directional hearing aid. The microphones are used to form a beam that is a cardioid in the free field. The directional pattern is to remain "good" for frequencies down to at least 500 Hz, with good directionality as low as 300 Hz as a goal. For this example, we concentrate on the low frequency behavior, and thus assume that the resonance frequencies and Q values for the two microphones are identical. Further, we assume that manufacturing tolerances on the microphones are such that the rolloff frequency can be controlled to within $\pm 10\%$.

[0044] In this example, if we set the nominal value for the rolloff to be 50 Hz, the patterns at 500 Hz are shown in FIGURE 10. This shows the degradation in the patterns in the worst case situation when one microphone

has its rolloff shifted by $+10\%$ and the other microphone is shifted by -10% . The patterns at 300 Hz are shown in FIGURE 11. The performance is clearly unacceptable at this frequency as the second polar shifts entirely to the backward direction. As a general rule, then, if the low frequency rolloff can only be controlled to $\pm 10\%$, then adequate beam pattern control can be achieved at frequencies that are approximately a decade above the rolloff frequency.

[0045] Now turning to the improvement that can be achieved with phase compensation as described herein, an objective is to use response compensation to achieve good directivity at 500 Hz using microphones whose low frequency rolloff varies by $\pm 10\%$ from a nominal value of 225 Hz. Another circuit 80 having the correct response for compensation of a pair of microphones is shown in FIGURE 12. The strategy is to compensate each of the two microphones 82,83 to provide an output 84,85, respectively, whose low frequency rolloff is at 250 Hz regardless of the uncompensated rolloff frequency. With sufficient resolution in the component values, this circuit 80 exactly compensates the difference in responses so that their frequency responses are identical.

[0046] In this example, in determining how much resolution is actually needed to achieve adequate directionality, it is assumed that the population of microphones described above includes samples with rolloff frequencies from approximately 200 Hz to 250 Hz. For instance, five compensation circuits can be provided which exactly compensate the response of microphones whose rolloff frequencies are at 205 Hz, 215 Hz, 225 Hz, 235 Hz, and 245 Hz with each microphone connected to the compensation circuit that most closely matches its actual rolloff frequency. Thus, the maximum deviation from "ideal" compensation is ± 5 Hz or $\pm 2\frac{1}{2}\%$ in rolloff frequency.

[0047] FIGURE 13 shows the improvement that is available with compensation, even when the compensation is imperfect. These polars are calculated at 500 Hz, with the compensated rolloff frequency at 250 Hz. In the top example (i.e., graph A of FIGURE 13), the compensation is perfect. In the other two polars (i.e., graphs B and C of FIGURE 13), the compensation is applied imperfectly; in each case, the microphones are compensated for a frequency that is in error by 5 Hz, and the error is in opposite directions for the two microphones. In graphs B and C, the polars have reasonably good directivity even at a frequency that is only an octave above the (compensated) rolloff of the microphones.

[0048] The method described herein for the compensation of low frequency rolloff is practically useful and can be implemented in the circuitry inside the microphone if the circuit values can be selected or trimmed to the proper values after the microphone is assembled. In such an embodiment, it is preferred that the low frequency rolloff be measured as a part of the final manufacturing process, and the circuit elements trimmed to

the proper values for adequate compensation.

A Practical Example- Resonance Frequency Compensation

[0049] As a final example, an electrical circuit is examined to compensate for a manufacturing variation in the resonance frequency of a microphone. Suppose in this example that a microphone has a desired resonance frequency of 6000 Hz, but its actual resonance frequency is 5% lower, or 5700 Hz. If circuit 3 in FIGURE 8 is chosen, which reduces the number of reactive components compared to some of the other circuits of FIGURE 8, a value of 47 nF can be used for C. This value, while somewhat arbitrary, is the largest value that is conveniently available in a small package. The value of L is calculated to resonate with C at the microphone resonance of 5700 Hz. This yields a value of 16.6 mH for L. Then C_1 is calculated to resonate with L at the desired frequency of 6000 Hz. The value of C_1 is 42.4 nF, and the value of C_2 is 433 nF.

[0050] In some applications, the 16 mH inductor and the 433 nF capacitor may be considered too large. An alternative would be to use circuit 2 of FIGURE 8, which eliminates the larger capacitor. But this circuit needs a second inductor whose value is approximately 1.6 mH. Accordingly, in an embodiment, it is preferred that the functionality of the compensation circuits of FIGURE 8 be implemented using synthetic inductors. This trades more practical reactive component values for additional active components.

[0051] In an alternative embodiment, the high frequency performance is improved by using a microphone with a resonance frequency that is above the frequency band that is important for directionality. If the resonance frequency is increased to the vicinity of 13 to 15 kHz, then good directionality is available to at least 10 kHz.

[0052] While the specific embodiments have been illustrated and described, numerous modifications come to mind without significantly departing from the spirit of the invention and the scope of protection is only limited by the scope of the accompanying Claims.

Claims

1. A device for receiving an audible input comprising:

a first microphone having an output responsive to the audible input;
a second microphone having an output responsive to the audible input;
a subtractor circuit responsive to the first microphone output and the second microphone output for producing a gain control output; and
a circuit responsive to the first microphone output and the gain control output for producing a gain compensated microphone output.

2. The device of Claim 1, further comprising a band-pass filter operably connected between the first microphone output and the subtractor circuit.
3. The device of Claim 2, further comprising a lowpass filter operably connected between the bandpass filter and the subtractor circuit.
4. The device of Claim 3, further comprising an RMS detector operably connected between the bandpass filter and the lowpass filter.
5. The device of Claim 1, further comprising a hearing aid housing operably attached to the first and second microphones.
6. The device of Claim 1, further comprising a shifting circuit responsive to the output of at least one of the microphone outputs having a low frequency rolloff that is shifted by the shifting circuit.
7. The device of Claim 1, further comprising a shifting circuit responsive to the output of at least one of the microphone outputs having a resonance frequency that is shifted by the shifting circuit.
8. A device for receiving an audible input comprising:
 - a hearing aid housing;
 - a first microphone operably attached to the hearing aid housing and having an output responsive to the audible input;
 - a second microphone operably attached to the hearing aid housing and having an output responsive to the audible input;
 - a phase adjustment circuit responsive to the first microphone output and a rolloff control output for producing a compensated microphone output; and
 - a subtractor circuit responsive to the compensated microphone output and the second microphone output for generating the rolloff control output.
9. The device of Claim 8, further comprising a band-pass filter operably connected between the subtractor circuit and the compensated microphone output.
10. The device of Claim 9, further comprising a band-pass filter operably connected between the subtractor circuit and the second microphone output.
11. The device of Claim 10, further comprising a buffer operably connected to the compensated microphone output.
12. The device of Claim 11, further comprising a buffer operably connected to the second microphone output.

put.

13. The device of Claim 8, further comprising a feedback circuit operably connected to the compensated microphone output and the phase adjustment circuit.

14. The device of Claim 13, wherein the said feedback circuit includes a capacitor.

15. The device of Claim 8, wherein the outputs of the microphones have a resonance frequency and a circuit is operably connected to at least one of the microphones for shifting the resonance frequency within the output of the microphone.

16. A device for amplifying an audible input comprising:

a first microphone having an output responsive to the audible input;

a second microphone having an output responsive to the audible input;

a gain difference subtractor circuit responsive to the first microphone output and the second microphone output for producing a gain control output;

a gain control circuit responsive to the first microphone output and the gain control output for producing a gain compensated microphone output;

a phase adjustment circuit responsive to the gain compensated microphone output and a rolloff control output for producing a matching output;

a phase difference subtractor circuit responsive to the matching output and the second microphone output for producing the rolloff control output; and

wherein the outputs of the microphones have a resonance frequency and a circuit is operably connected to at least one of the microphones for shifting the resonance frequency within the output of the microphone.

17. The device of Claim 16, further comprising a band-pass filter operably connected between the front microphone and the subtractor circuit.

18. The device of Claim 16, further comprising a band-pass filter operably connected between the subtractor circuit and the compensated microphone output.

19. The device of Claim 18, further comprising a band-pass filter operably connected between the subtractor circuit and the second microphone output.

20. The device of Claim 16, further comprising a buffer operably connected to the compensated microphone

phone output.

21. The device of Claim 16, further comprising a buffer operably connected to the second microphone output.

22. The device of Claim 16, further comprising a feedback circuit operably connected to the compensated microphone output and the phase adjustment circuit.

23. The device of Claim 16, wherein said feedback circuit includes a capacitor.

24. The device of Claim 16, further comprising a hearing aid housing operably attached to said first and second microphones.

25. A circuit for shifting the rolloff of a microphone comprising:

an input terminal for receiving an output from the microphone;

an amplifier having an inverting input and an output;

a gain control circuit operably connected between the input terminal and the inverting input of the amplifier for adjusting the gain of the microphone output; and

a feedback circuit operably connected to the output of the amplifier and the inverting input, the feedback circuit including a feedback adjustment circuit responsive to a rolloff control output.

26. The device of Claim 25, wherein said feedback circuit includes a capacitor.

27. A method for matching an audible input comprising:

producing a first microphone output responsive to the audible input;

producing a second microphone output responsive to the audible input;

generating a gain control output in response to the difference between the first microphone output and the second microphone output;

producing a gain compensated microphone output in response to the first microphone output and the gain control output;

producing a matching output in response to the compensated microphone output and a rolloff control output; and

generating the rolloff control output in response to the difference between the matching output and the second microphone output.

28. The method of claim 27, further including the steps

of receiving the output of at least one of the microphones having a resonance frequency and shifting the resonance frequency of the microphone output to a predetermined desired frequency.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

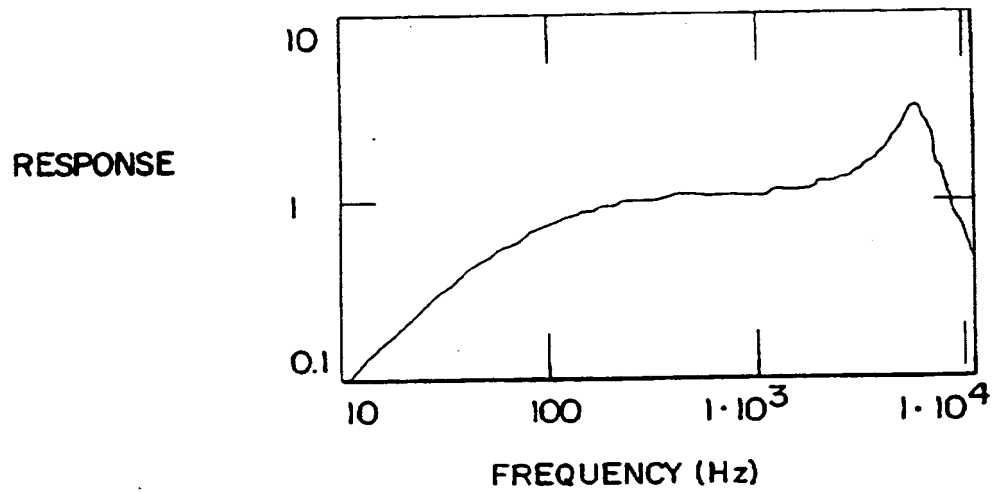


FIG. 2

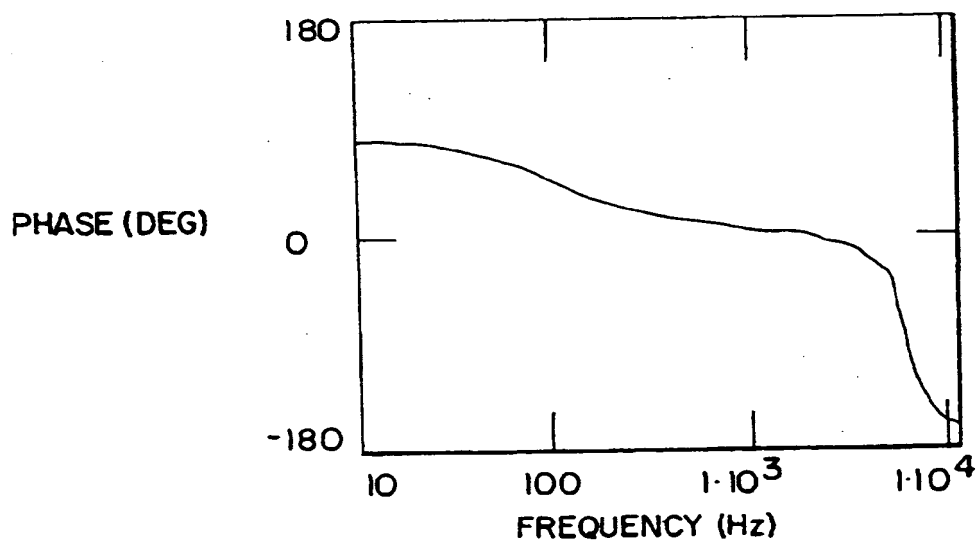


FIG. 3

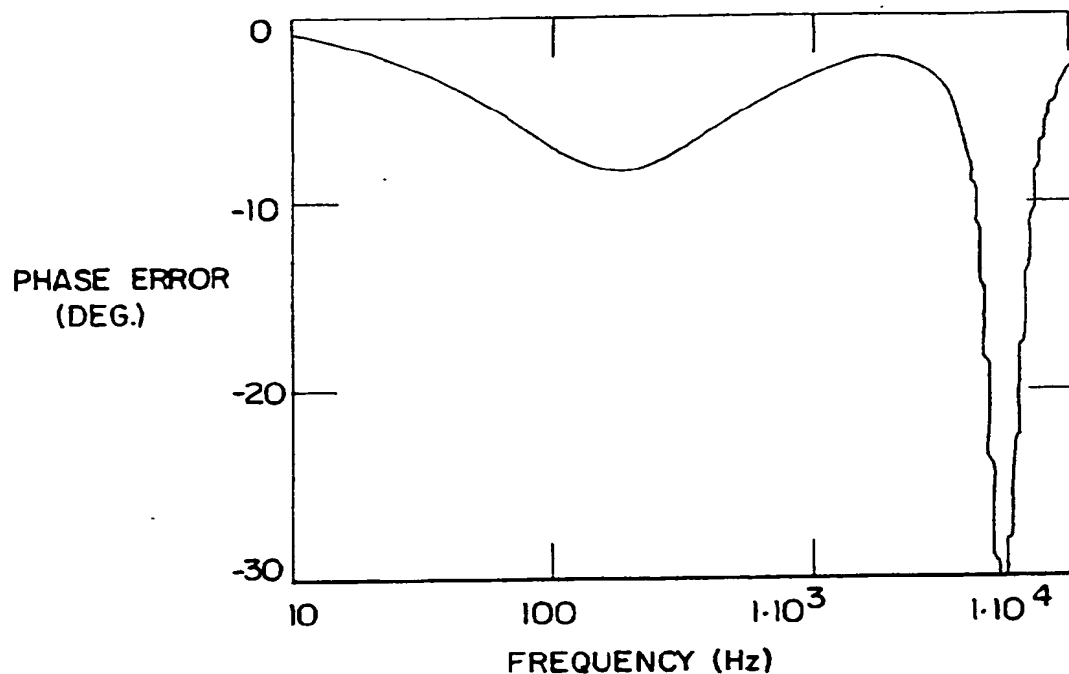


FIG. 4

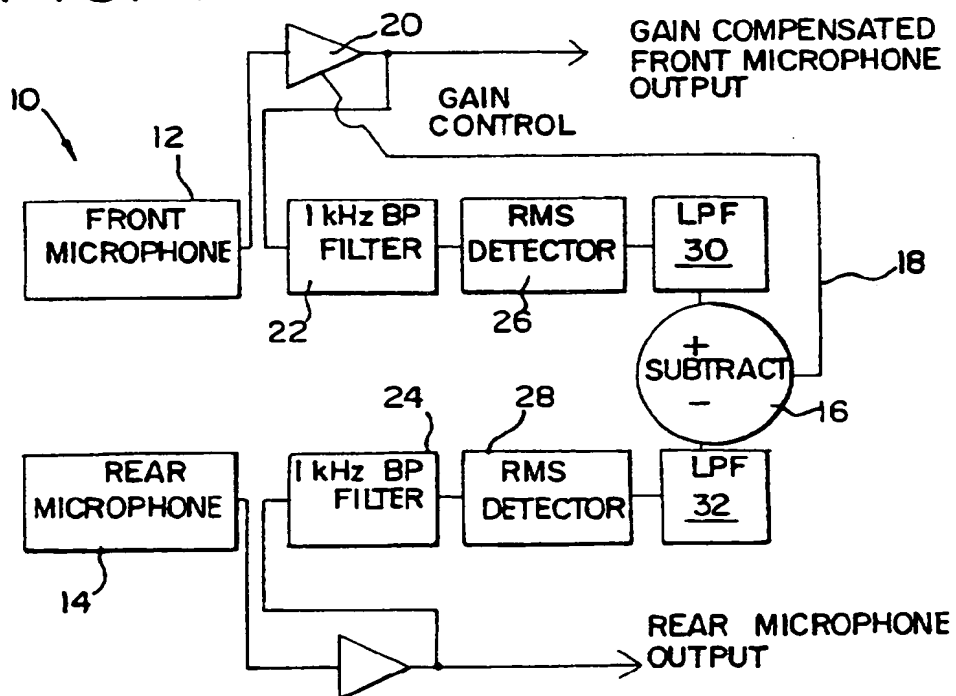


FIG. 5

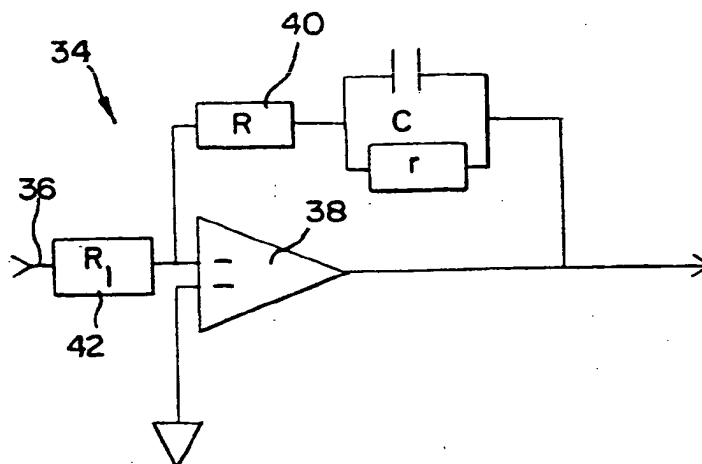


FIG. 6

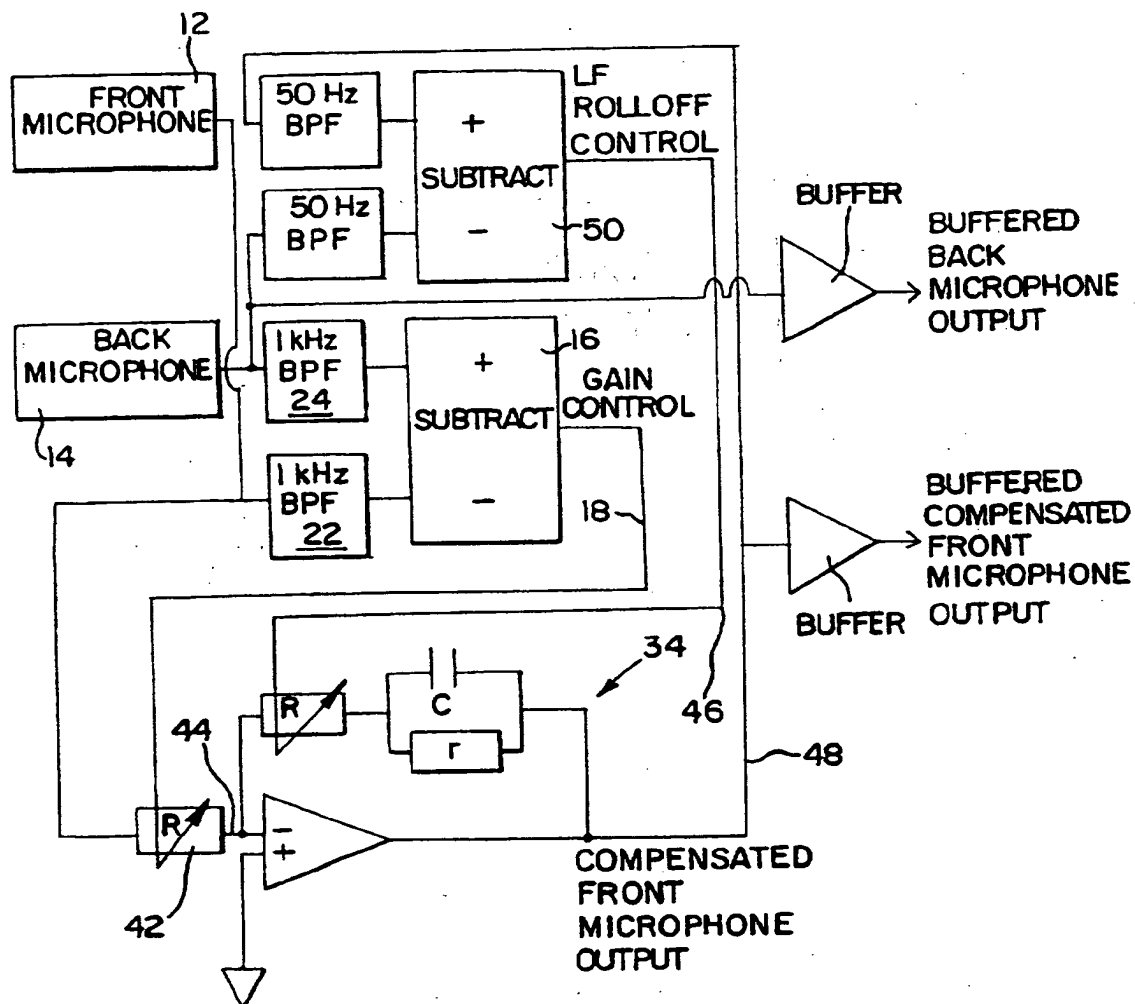


FIG. 7


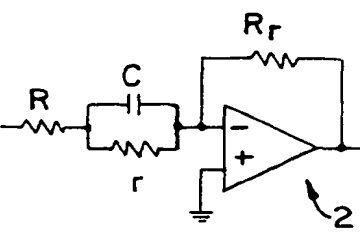

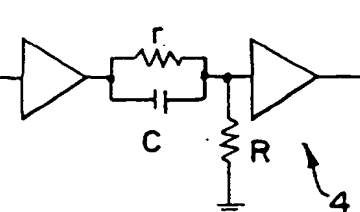
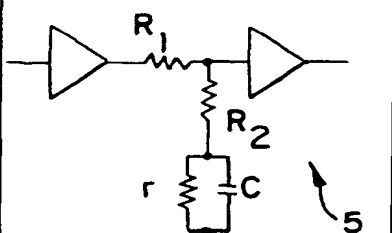
SCHEMATIC	TRANSFER FUNCTION	COMMENTS
	$-\frac{R+r}{R_1} \left[\frac{1+j\omega \frac{Rr}{R+r} C}{1+j\omega r C} \right]$	<p>CAN BE USED TO RAISE THE ROLLOFF FREQUENCY.</p> <p>INVERTING</p>
	$-\frac{R_1}{R+r} \left[\frac{1+j\omega r C}{1+j\omega \frac{Rr}{R+r} C} \right]$	<p>CAN BE USED TO LOWER THE ROLLOFF FREQUENCY.</p> <p>INVERTING</p>
	$\frac{R+r}{R} \left[\frac{1+j\omega \frac{Rr}{R+r} C}{1+j\omega r C} \right]$	<p>CAN BE USED TO RAISE THE ROLLOFF FREQUENCY.</p> <p>NON-INVERTING</p>
	$\frac{R}{R+r} \left[\frac{1+j\omega r C}{1+j\omega \frac{Rr}{R+r} C} \right]$	<p>CAN BE USED TO RAISE THE ROLLOFF FREQUENCY.</p> <p>NON-INVERTING</p>
	$\frac{r+R_2}{r+R_1+R_2} \left[\frac{1+j\omega \frac{rR_2}{r+R_2} C}{1+j\omega \frac{r(R_1+R_2)}{r+R_1+R_2} C} \right]$	<p>CAN BE USED TO LOWER THE ROLLOFF FREQUENCY.</p> <p>NON-INVERTING</p>

FIG. 8

SCHEMATIC	TRANSFER FUNCTION	COMMENTS
	$\frac{C}{C_f} \frac{1 - j\omega^2 L_f C_f + j\omega R_f C_f}{1 - j\omega LC + j\omega RC}$	CAN EITHER RAISE OR LOWER THE RESONANCE FREQUENCY. INVERTING
	$\frac{L}{L + L} \frac{1 - j\omega^2 (L + L_f) C + j\omega RC}{1 - j\omega^2 LC + j\omega RC}$	CAN RAISE THE RESONANCE FREQUENCY. NON-INVERTING
	$\frac{C_1}{C} \frac{1 - j\omega^2 LC + j\omega RC}{1 - j\omega^2 LC_1 + j\omega RC_1}$ WHERE $C_1 = \frac{C C_f}{C + C_f}$	CAN RAISE THE RESONANCE FREQUENCY. NON-INVERTING
	$\frac{L + L_f}{L} \frac{1 - j\omega^2 LC + j\omega RC}{1 - j\omega^2 (L + L_f) C + j\omega RC}$	CAN LOWER THE RESONANCE FREQUENCY. NON-INVERTING
	$\frac{C}{C_1} \frac{1 - j\omega^2 LC_1 + j\omega RC_1}{1 - j\omega^2 LC + j\omega RC}$ WHERE $C_1 = \frac{C C_f}{C + C_f}$	CAN LOWER THE RESONANCE FREQUENCY. NON-INVERTING

FIG. 10

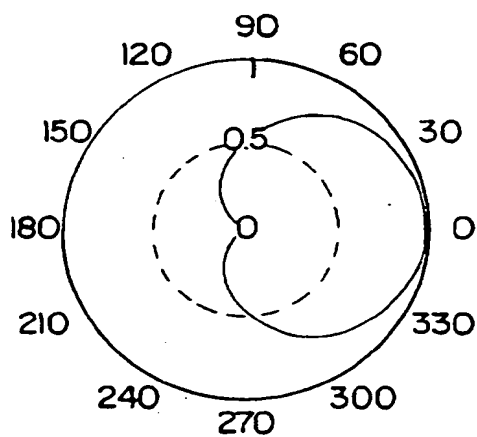


FIG. 11

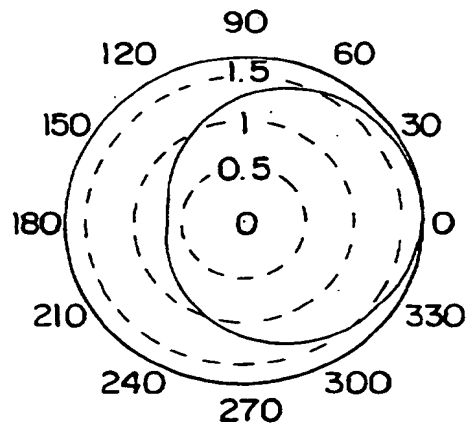
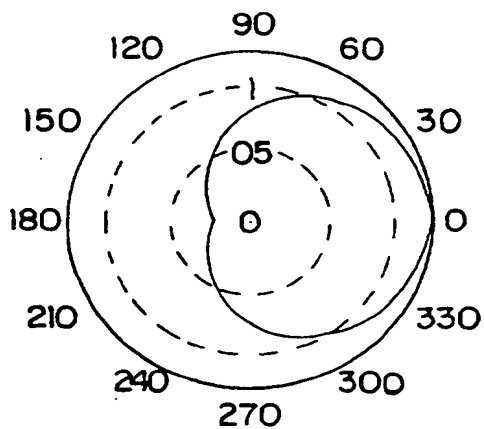
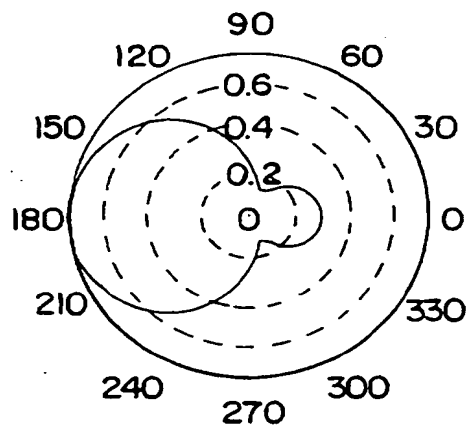
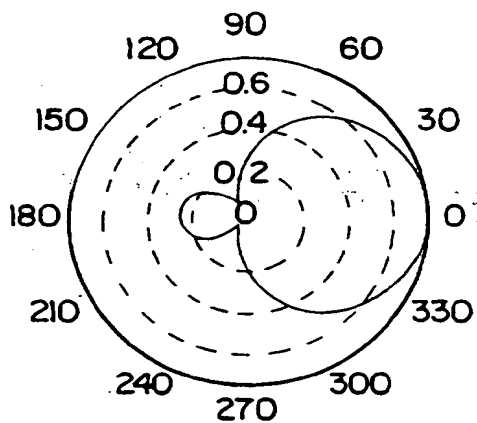
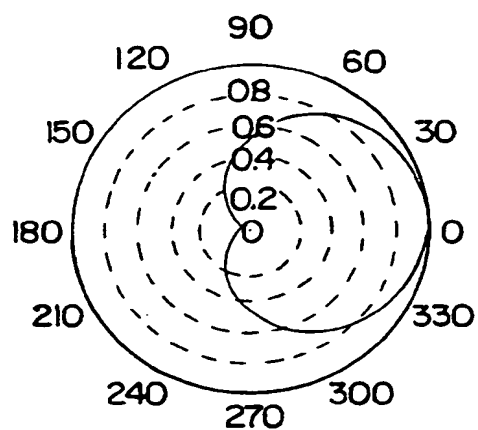


FIG. 9

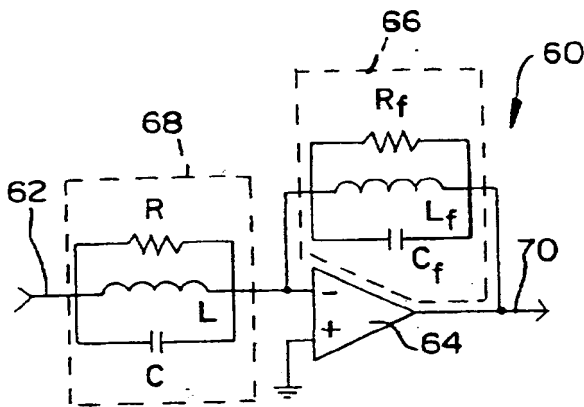


FIG. 12

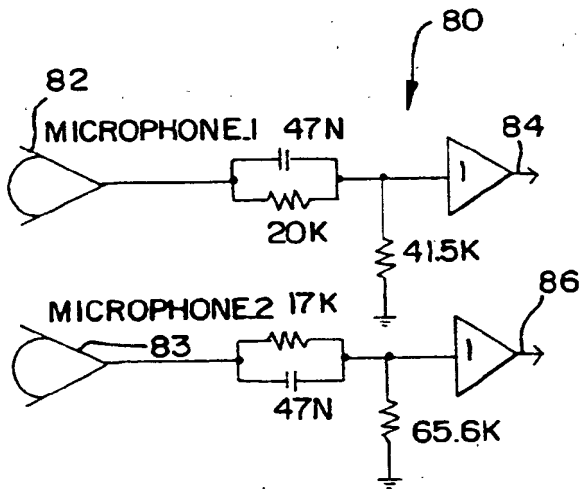


FIG. 13A

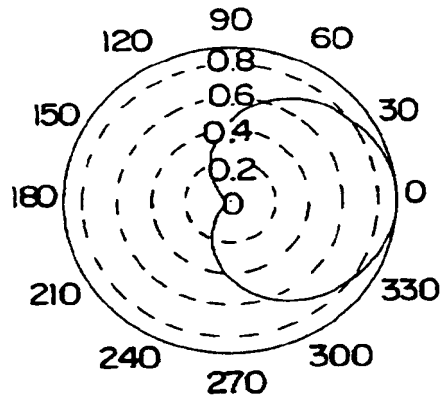


FIG. 13B



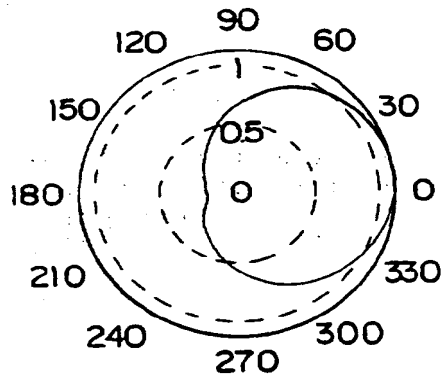


FIG. 13C



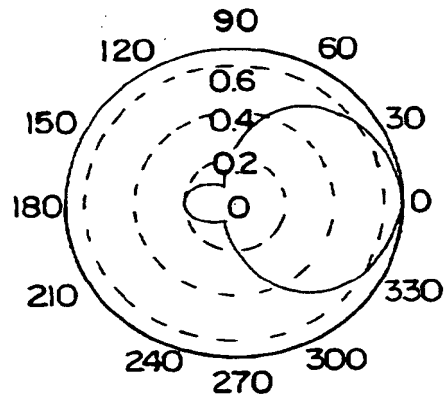

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 982 971 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
18.04.2001 Bulletin 2001/16

(51) Int Cl.7: **H04R 25/00**, **H04R 3/04**,
H04R 3/00

(43) Date of publication A2:
01.03.2000 Bulletin 2000/09

(21) Application number: **99306623.2**

(22) Date of filing: **20.08.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **KNOWLES ELECTRONICS, INC.**
Itasca, Illinois 60143 (US)

(72) Inventor: **Thompson, Stephen C.**
Naperville, IL 60564 (US)

(30) Priority: **25.08.1998 US 97926 P**
16.11.1998 US 193012


(74) Representative: **Dunlop, Brian Kenneth Charles**
c/o Wynne-Jones, Lainé & James
22 Rodney Road
Cheltenham Gloucestershire GL50 1JJ (GB)

(54) **Apparatus and method for matching the response of microphones in magnitude and phase**

(57) An apparatus is provided for matching the response of a pair of microphones. The two microphones provide a first and second output, respectively, in response to an audible input. The microphone outputs are subtract from each other to produce a gain control output for operably controlling the gain of the first microphone output, resulting in a gain compensated microphone output. A phase adjustment circuit also is provided

ed responsive to the gain compensated microphone output and a rolloff control output for producing a matching output. The rolloff control output is generated by a phase difference subtractor circuit responsive to both the matching output and the second microphone output. Moreover, the output of at least one of the microphones has a resonance frequency that is shifted to a desired preselected frequency.

FIG. 4

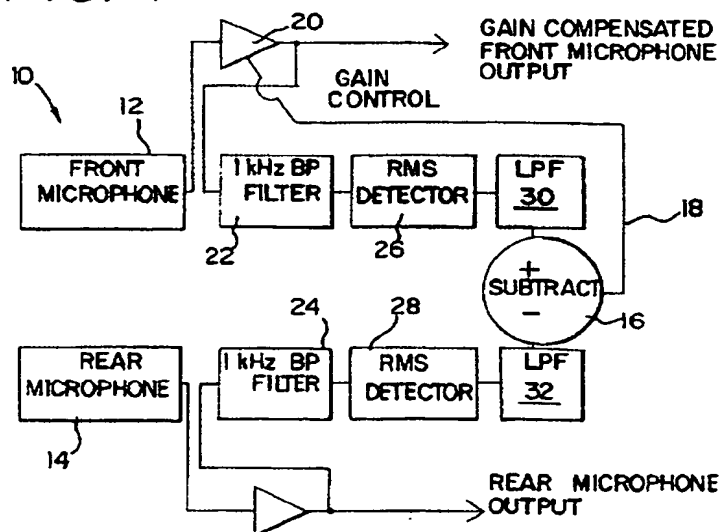



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 6623

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 4 420 655 A (SUZUKI TAKUYA) 13 December 1983 (1983-12-13) * column 1, line 9-19 *	1,5	H04R25/00 H04R3/04 H04R3/00
A	* column 2, line 50-56 * * column 3, line 23 - column 5, line 27 *	2-4,6-28	
Y	US 4 509 022 A (RIDEL PHILIPPE) 2 April 1985 (1985-04-02) * column 1, line 6-16 *	1,5	
A	* column 1, line 59 - column 2, line 48 *	13,14, 16,22-27	
A	US 4 622 440 A (SLAVIN MARTIN J) 11 November 1986 (1986-11-11) * column 1, line 39-49 * * column 2, line 54 - column 3, line 20 * * column 4, line 36-62 * * column 5, line 9-16 *	1-28	
A	EP 0 509 742 A (MATSUSHITA ELECTRIC IND CO LTD) 21 October 1992 (1992-10-21) * column 2, line 48 - column 4, line 3 *	1,6-8, 16,22, 25,27,28	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04R
A	PATENT ABSTRACTS OF JAPAN vol. 008, no. 167 (E-258), 2 August 1984 (1984-08-02) -& JP 59 064994 A (MATSUSHITA DENKI SANGYO KK), 13 April 1984 (1984-04-13) * abstract *	1,8,16, 25,27	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 February 2001	Examiner Zanti, P
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (03.02.92) (P.04/001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 6623

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4420655 A	13-12-1983	JP 1387030 C	14-07-1987
		JP 57015597 A	26-01-1982
		JP 61059599 B	17-12-1986
		DE 3126180 A	08-04-1982
US 4509022 A	02-04-1985	FR 2522451 A	02-09-1983
		DE 3306441 A	08-09-1983
		DK 93983 A, B,	02-09-1983
		GB 2117200 A, B	05-10-1983
		IT 1167626 B	13-05-1987
		JP 58162115 A	26-09-1983
US 4622440 A	11-11-1986	AU 4104985 A	17-10-1985
		BE 902172 A	31-07-1985
		BR 8501694 A	10-12-1985
		DE 3512999 A	17-10-1985
		DK 161585 A	12-10-1985
		FR 2562789 A	18-10-1985
		GB 2158676 A	13-11-1985
		GR 850919 A	25-11-1985
		IT 1209948 B	30-08-1989
		JP 60244200 A	04-12-1985
		NL 8501042 A	01-11-1985
		NO 851432 A	14-10-1985
		PT 80273 A, B	01-05-1985
		SE 8501743 A	12-10-1985
		ZA 8502656 A	24-12-1985
EP 0509742 A	21-10-1992	JP 2770593 B	02-07-1998
		JP 4318796 A	10-11-1992
		JP 2770594 B	02-07-1998
		JP 4322598 A	12-11-1992
		DE 69221762 D	02-10-1997
		DE 69221762 T	05-03-1998
		US 5226087 A	06-07-1993
JP 59064994 A	13-04-1984	NONE	

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)